


Insulated Delrin TopHats

Introducing the Complete Tapping Service Insulated Delrin Top Hat for all your flanged fitting connections.

Sizes available in: M16, M20, M24, M27 and M30

Ensure that your flanged connection protects your assets from corrosion by using our Insulated Top Hats and prolong your asset's lifetime.

Made from approved Plastic Polymer Material, these Insulated Top Hats comply with AS4020 and make your flanged connections easy to assemble.

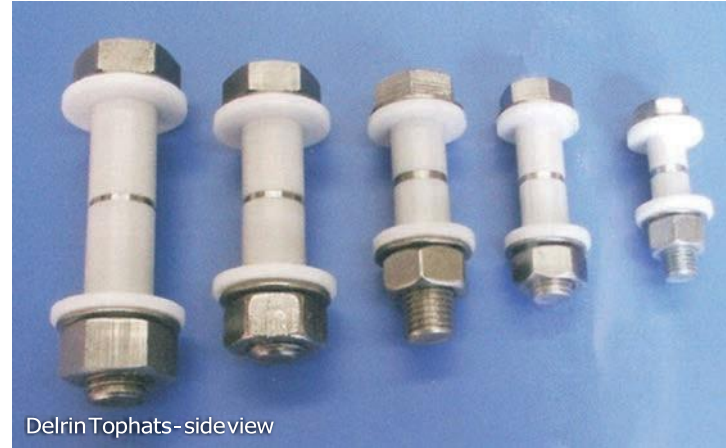

Recommended Bolt Tension

ITEM	DESCRIPTION	TORQUE(Nm)
1	M16	65
2	M20	140
3	M24	280
4	M27	380
5	M30	480

Note: It is recommended that a Torque Wrench is used when tensioning up the bolt

Disclaimer: The information provided within is based on established engineering principals and is offered by Wang Components in good faith as a source of information for its customers. Successful installation depends on numerous factors outside the Company's control and installers should be aware that these guidelines might not be successful for every installation. Wang Components disclaims any liability to any person who solely relies on this information for the purposes of making a flange joint.



For further information and orders, please contact:

Victoria - Head Office
105 Atlantic Drive
Keysborough Vic 3173
p: (03) 9769 0218
f: (03) 9769 0219

New South Wales
p: (02) 4988 6299
f: (02) 4988 6263

Queensland
p: 0418 197 545
FNQ
p: 0428 559 989

South Australia
p: (08) 8558 3808
f: (08) 8558 3896

Tasmania
p: (03) 6394 4663
m: 0418 921 938

Western Australia
p: (08) 9244 4622
f: (08) 9204 4666

Expect... **AVR**