


AVK SUPA LOCK™



# SUPA LOCK™ THREADLESS CONNECTION SYSTEM

Expect... **AVR**

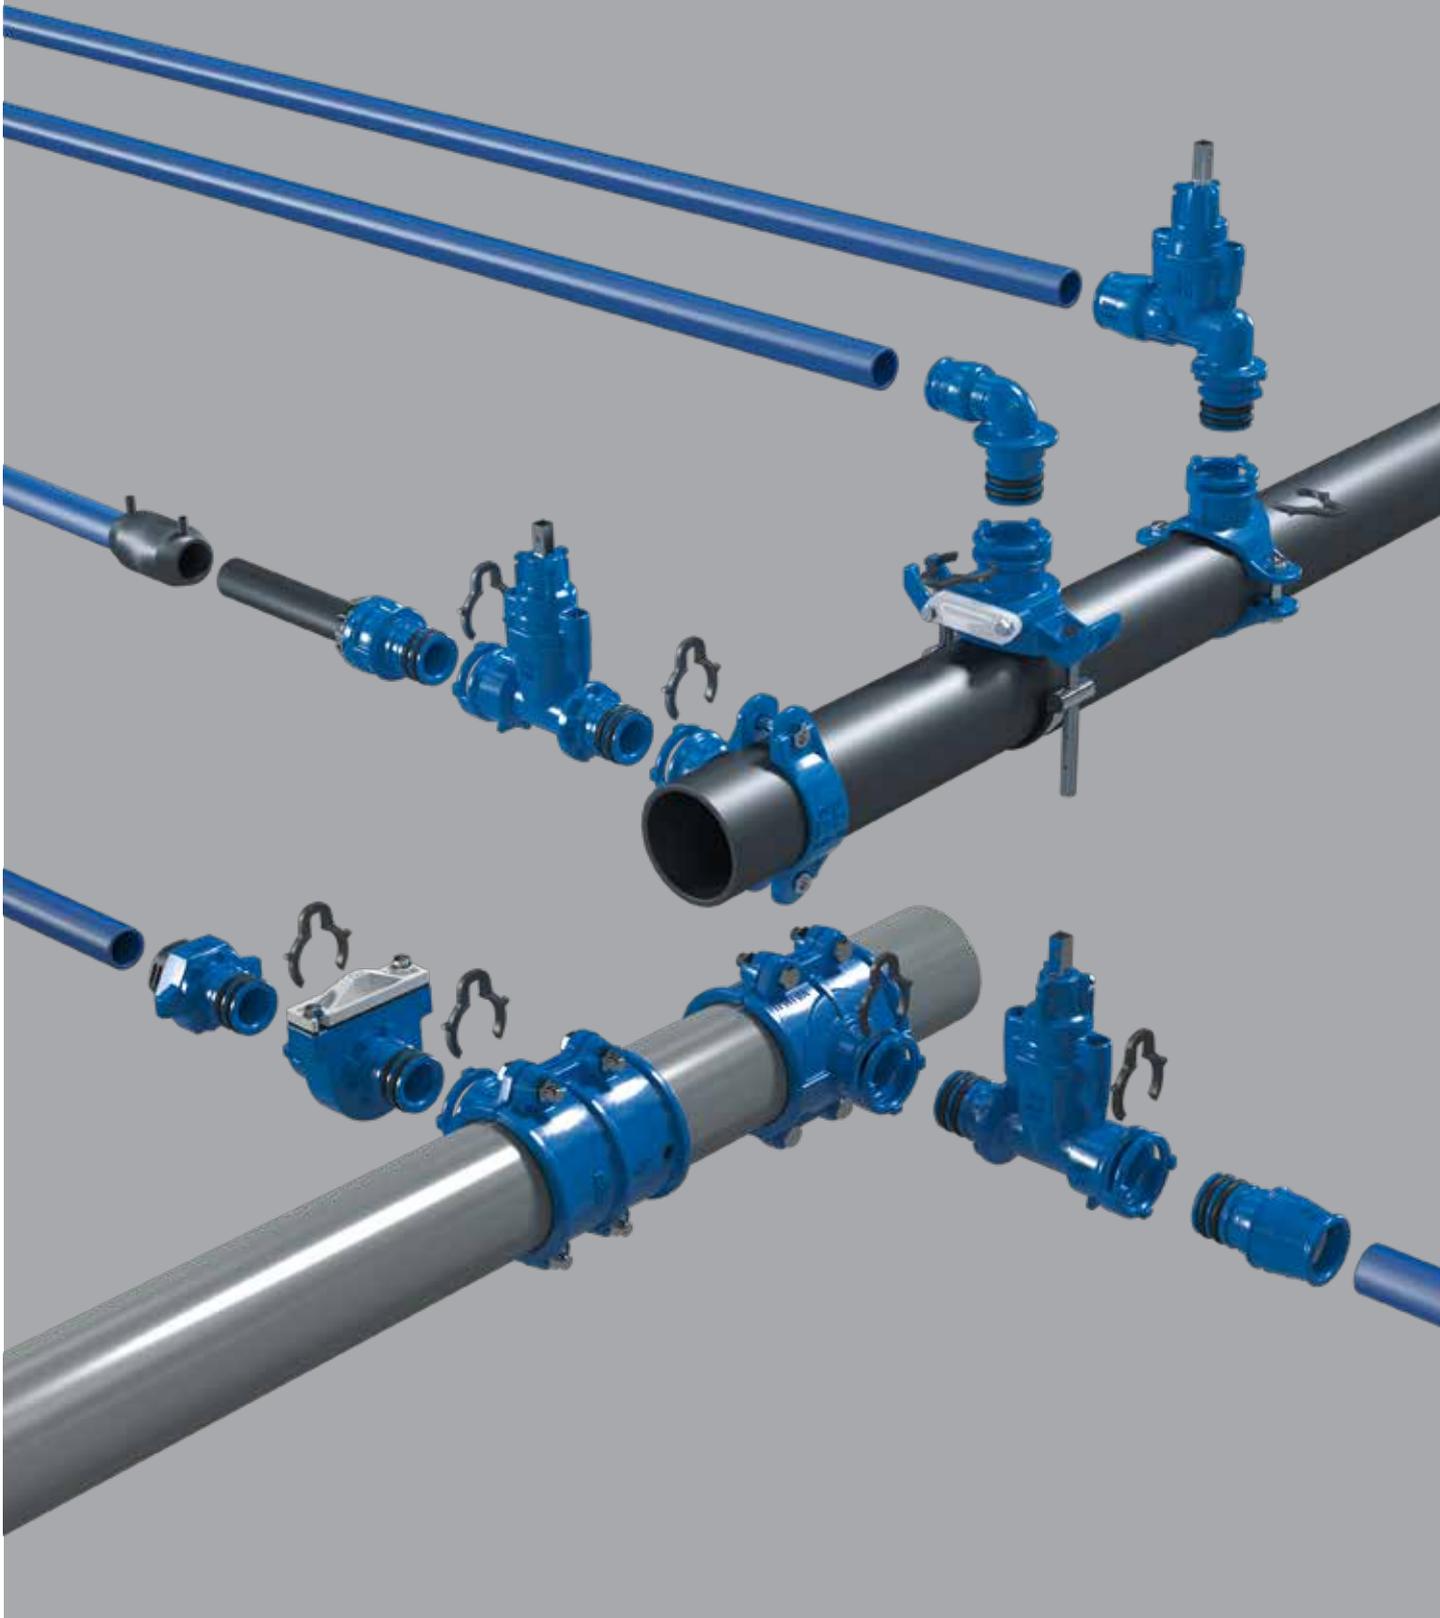

# AVK SUPA LOCK™ THREADLESS CONNECTION SYSTEM



Connecting valves and fittings with a threaded connection can be time-consuming and often, it leaves part of the thread exposed to the medium and the external environment. Over time this will cause corrosion of the uncoated thread and may even result in a leakage. Supa Lock™ solves this problem.

#### Full corrosion protection

The patented Supa Lock™ system, provides a 100% corrosion free joint combined with fast and easy assembly with maximum flexibility. Thanks to its simple and ingenious design, Supa Lock™ offers long-term safety with optimum protection against corrosion and leaks and also protection against accidental disassembly of the joint when the pipeline is pressurized.

#### Valves, tapping saddles and fittings

The wide Supa Lock™ range consists of valves, tapping saddles and fittings in ductile iron with a heavy duty epoxy coating complying with the strict GSK requirements. Furthermore, ball valves and fittings in dezincification resistant brass complying with the EU directive for material used in drinking water installations are part of the range.

*Easy two-step assembly*  
After having lubricated the O-rings, the Supa Lock™ spigot end is pushed into the Supa Lock™ socket end, and the safety retainer is clicked on – and the assembly is done!





### Self-locking safety retainer

Supa Lock™ is designed as a tensile joint and withstands pressures up to PN16 x 1.5. The safety retainer is designed with an edge (1), which makes it self-locking whenever there is pressure in the pipeline. Therefore, no accidental disassembly can take place. The safety retainer has two finger knobs (2) for easy assembly and disassembly.



### No rotation of valves and connectors

Free rotation is restricted for the valves and the threaded connectors used for drilling machines to enable effective drilling. Small cast notches placed on the outer rim of the socket end and on the inner rim of the spigot end interlock and prevent rotation.



### Corrosion-free access point

For flanged connections in DN80-400, the wafer type spacer with Supa Lock™ socket connections offers a corrosion protected access point to the pipe. It can replace a tapping and in that way avoid weakening of the pipe.



### 360° rotation of fittings

The design allows for a 360° rotation of the fittings, which is a unique feature only offered by the Supa Lock™ system. The free rotation of the joint allows the installer to direct the service pipe outlet in any direction from the main pipe, thus avoiding collision with other pipes or obstacles in the trench.



### Heavy duty O-rings provide extra safety

All Supa Lock™ joints are fitted with heavy duty Ø7 mm O-rings. They provide extra safety when taking into account that a minor permanent deformation of the O-rings is to be expected over the lifetime of the product. Also, when the joint is exposed to bending as a result of ground movements, the large O-rings provide maximum safety.



### Supa Lock™ valves

Supa Lock service connection valves in ductile iron are of the renowned AVK design and are available with Supa Lock™ spigot end X Supa Lock™ socket end or PRK coupling, and the angle valves are available with Supa Lock™ socket end or push-in socket end. The brass ball valves are available with Supa Lock™ spigot end X threaded end, PRK coupling or tensile screw coupling.



### Supa Lock™ tapping saddles

Supa Lock™ tapping saddles are available in variants for PVC/PE pipes and for iron/steel pipes and with/without blade shut-off. A large profiled rubber gasket of drinking water approved EPDM rubber ensures a drop tight seal against the pipe, and A4 nuts located in a recess ease the installation and prevent them from rotating when tightening the bolts.

The tapping saddles for blade shut-off act as a temporary valve during the drilling process. The tapping head is a low-cost alternative to a valve, but without possibility of operation from ground level.



### Supa Lock™ fittings

The wide range of Supa Lock™ fittings includes straight and angled push-in fittings, fittings with PE end for direct welding into PE pipes, fittings with PRK and tensile screw couplings, spacers serving as access point to the pipe without tapping, 3-way socket fittings for branching off the pipeline, double spigot fittings for reversing male/female connections, socket and spigot fittings serving as tapping point for service connections, sensor fittings, blind flanges and plugs, etc.

The angled fittings can be rotated 360° once installed, thus offering great flexibility. The free rotation of the joint allows the installer to direct the service pipe outlet in any direction from the main pipe, thus avoiding collision with other pipes or obstacles in the ground.

### Supa Lock™ threaded connectors

The threaded connectors with internal thread for connection to drilling machines are available in ductile iron or brass. They are designed with rotation stop to prevent the fitting from rotating during the drilling process, and can of course be reused. The transition connectors with external thread are used to connect a threaded system to the Supa Lock™ system.

See the full range in our Supa Lock™ product range overview.



#### AVK INTERNATIONAL A/S

Bizonvej 1  
DK-8464 Galten  
Denmark

Tel: +45 87 54 21 00  
[www.avkvalves.eu](http://www.avkvalves.eu)

2021-10-29  
Copyright © AVK Group A/S 2021

Expect... **AVR**